



**NON-CONTACT SAFETY SWITCHES** 



### RE27-SA68LS04 | RE2

NON-CONTACT SAFETY SWITCHES



#### Ordering information

Туре	Part no.
RE27-SA68LS04	1065233

Other models and accessories -> www.sick.com/RE2



# Detailed technical data

#### Features

System part	Sensor and actuator
Sensor principle	Magnetic
Number of N/O contacts	2
Number of N/C contacts	0
Number of signaling contacts	1
Safe switch on distance $\mathbf{S}_{ao}$	9 mm
Safe switch off distance S <sub>ar</sub>	20 mm
Active sensor surfaces	1
Actuation directions	3

#### Safety-related parameters

B <sub>10d</sub> parameter	$2 \times 10^7$ switching cycles (with small load)
Туре	Type 4 (EN ISO 14119)
Actuator coding level	Low coding level (EN ISO 14119)
Safe state in the event of a fault	The switch has no internal fault detection and is unable to assume a safe state in the event of a fault. Fault detection is performed by the connected safety-related logic unit.

#### Interfaces

Connection type	Cable with plug M12, 8-pin
Flexi-Loop-ready	✓
Length of cable	0.2 m
Cable material	PVC
Status display	✓

#### Electrical data

Type of output	Reed contacts
Switching voltage	≤ 30 V DC
Switching current	$\leq$ 100 mA $\leq$ 10 mA <sup>1)</sup>

 $^{1)}$  On N/O contact with LED.


## RE27-SA68LS04 | RE2

NON-CONTACT SAFETY SWITCHES

#### Mechanical data

Design	Rectangular
Dimensions (W x H x D)	25 mm x 88 mm x 13 mm
Weight	0.1 kg
Housing material	Glass-fiber reinforced PPS
Ambient data	
Enclosure rating	IP67 (IEC 60529)
Ambient operating temperature	-20 °C +60 °C
Storage temperature	-20 °C +60 °C
Vibration resistance	10 Hz 55 Hz, 1 mm (EN 60947-5-3)
Shock resistance	30 g, 11 ms (EN 60947-5-3)
Classifications	
ECI@ss 5.0	27272402
ECI@ss 5.1.4	27272402
ECI@ss 6.0	27272402
ECI@ss 6.2	27272402
ECI@ss 7.0	27272402
ECI@ss 8.0	27272402
ECI@ss 8.1	27272402
ECI@ss 9.0	27272402
ETIM 5.0	EC002544
ETIM 6.0	EC002544
UNSPSC 16.0901	39122205

#### Dimensional drawing (Dimensions in mm (inch))

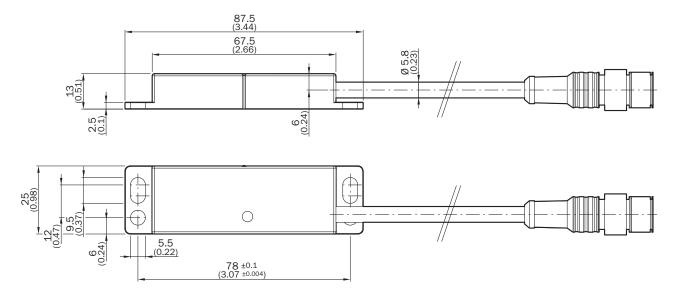


2018-07-31 09:33:28 | Online data sheet Subject to change without notice

### RE27-SA68LS04 | RE2

NON-CONTACT SAFETY SWITCHES

#### Response range

RE27

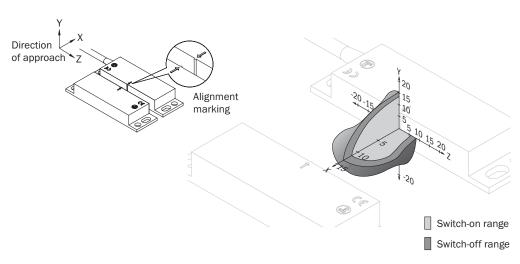


#### **Connection diagram**

RE27-SA68LS04: sensor connections



3 BN	N/O contract	
4 WH	N/O contact	
7 BU	N/O contact	
8 BK	N/O contact	
1 PK	N/O contact (AUX) with LED	
6 GY	Ny O CONTACT (AOX) WITH LED	

#### Sensor timing

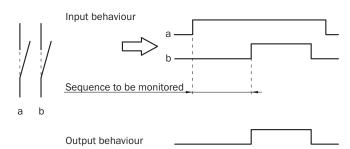

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

## WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com



Online data sheet

